



- **Manufacturer & Exporters of FRP ( Fiberglass Cable Trays, Ladder and Perforated type.**

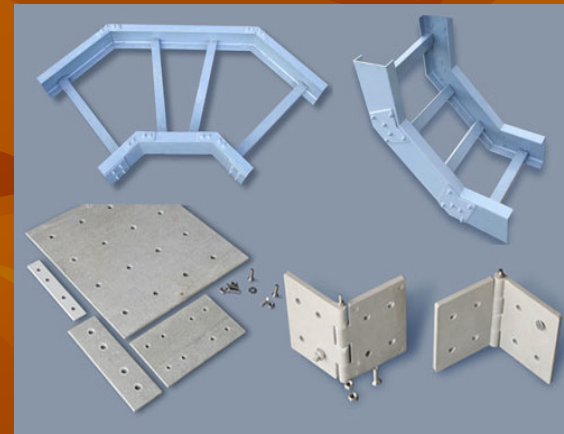

**Dhanshree** IMPEX

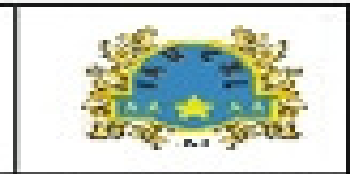

AN ISO 9001 : 2008 Certify

- Gujarat, India, [www.dhanshreeimpex.com](http://www.dhanshreeimpex.com)
- [info@dhanshreeimpex.com](mailto:info@dhanshreeimpex.com) . Ph: (+91) – 982-529-1062

## About Us :

We M/s Dhanshree Impex, Establish in year 2007 With awesome knowledge of Mr. D R Gajjar – CEO.

We have our Own Pultrusion unit having 2 Machines with 7 lines, Total area are 14000 sq ft and Plant area are 6000 sq ft., Using High quality of Fiber glass and Resin to meet the technical meet and requirements, Keep the Quality of Material is out motto.

We Dhanshree brand Produce, FRP cable Trays in Ladder and Perforated types, as per customer requirements.

### 1) Perforated Types :




Types available for cable tray system	
Thickness in MM	Size of side rails height x Weight
3	75 x 25 mm
4,5	80 x 30 mm
4,5	100 x 30 mm
4,5,6	150 x 35 mm


Available in Customize Color,, UV & FR, In Polyester, Venyleter Resin, maximum Length more then 3 mtr also, Side plate & Cable trays covers & relevant SS 304 & SS 316 Bolt, 90 degree Vertical horizontal elbow etc etc.

## 2) Ladder Type Cable Trays

Available as per NEMA (National Electric Manufacturers Association) FGI -1993 with revision for Fiberglass Cable Tray System.

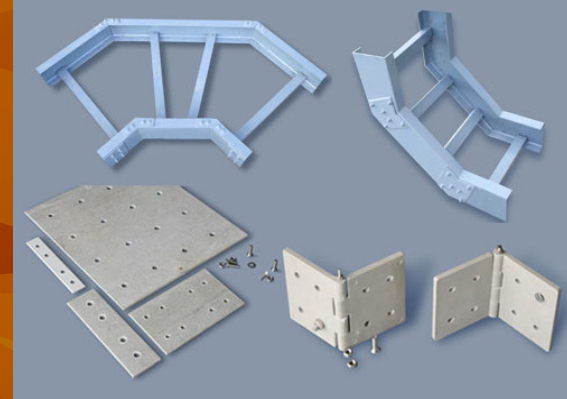

1. Dhanshree Cable tray is available in Polyester as well as vinyl ester resin system.
  2. Our cable tray has a 'C' section as side rail.
  3. Our cable tray has a square type rung & rung connection is made with mechanical & adhesive lock. ( 25 x 25 x 19 mm square hollow Pipe).
  4. Rung internals are designed to eliminate rolling over during cable installation and are placed 900/750/500/450/ 300mm/250 / 150mm apart or as per customize Requirements.
- Splice plates & fasteners are sold separately and are not provided as standard supply along with straight section. Size of the bolt use for connector plates are 8mm x 20mm Hex Bolt with Nut, 2 Plain Washer & 1 spring washer. This bolt sets are available in SS304 & SS316 quality.

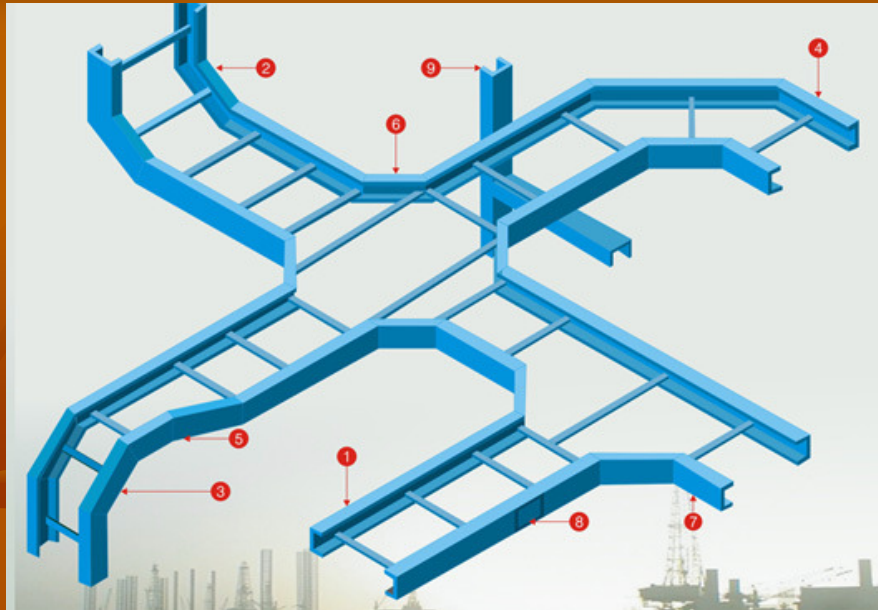

NO	ITEM NAME
1	STRAIGHT RUN
2	90° INSIDE VERTICAL BEND
3	90° OUTSIDE VERTICAL BEND
4	90° HORIZONTAL BEND
5	LEFT HAND REDUCER
6	HORIZONTAL CROSS
7	HORIZONTAL TEE
8	SPLICE PLATE FOR JOINING

### Advantages:

- Corrosion Resistance
- Light in Weight
- Easy to Install & replace
- As it is self pigmented No need of painting
- Fire Retardant & Ultra Violet (UV) Stabilized
- Strength & Durability
- Available in all colour

### Applications:

- Chemical Industries
- Highly Corrosive Area
- Off Shore Platforms
- Oil & Gas Refineries
- Water Treatment Plants
- Paper Industries
- Power Plants

**Applicable Standards:**

- NEMA FG1-1993 Standard For FRP/GRP Cable Tray Loading Specifications.
- IS6746:1994 Standard for Fire Retardant properties of FRP/GRP Cable Trays,
- IS6746 Appendix K for Low Flammability,
- ASTM standards for Typical Properties of FRP/GRP Cable Trays as under.
- ASTM D 2863 – Oxygen Index Test
- ASTM D 570 - Water Absorption Test
- ASTM D 638 - Tensile Properties
- ASTM D 695 - Compressive Properties
- ASTM D 790 - Flexural Properties
- ASTM D 256 - Izod Impact Strength
- ASTM D 149-97a – Die Electrical Strength (Axial & Radial)

**For More Details for inquiry Contact below**

**M/s DHANSHREE IMPEX**

**14, Narayan Nidhi complex, Near Vaishali cinema, Nadiad-387002, Gujarat,  
India. Ph : (+91) 982-529-1062 / 942-785-3389**

**Email : [info@dhanshreeimpex.com](mailto:info@dhanshreeimpex.com) / [gajjardr@gmail.com](mailto:gajjardr@gmail.com)**

**Web : [www.dhanshreeimpex.com](http://www.dhanshreeimpex.com)**